

ARGONAUT

DECK MOUNT TUB FILLER

Model #:
AG241-1



BEFORE YOU BEGIN YOUR INSTALLATION:

1



Turn off water supply.

2



Observe all local
plumbing codes.

3



Inspect plumbing for signs of
damage. Replace as necessary.

4




DO NOT use petroleum based
products on this faucet.

REQUIRED TOOLS AND MATERIALS:



1/4" Hex Key Wrench




Adjustable Wrench

WARNING: Cancer and reproductive harm - see www.P65Warnings.ca.gov

IMPORTANT!


- Read these instructions and plan the installation before beginning.
- Risk of product damage. Do not apply direct heat to the valve. Excessive heat will damage the plastic components and plaster guard.
- A mixed water supply is required for this product.
- Component location, spacing, and situational requirements can vary.

1.

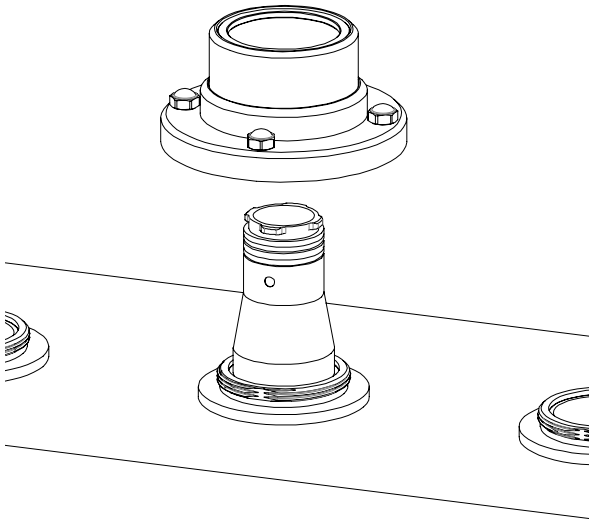


Thread the spout hub to the rough in.

2.

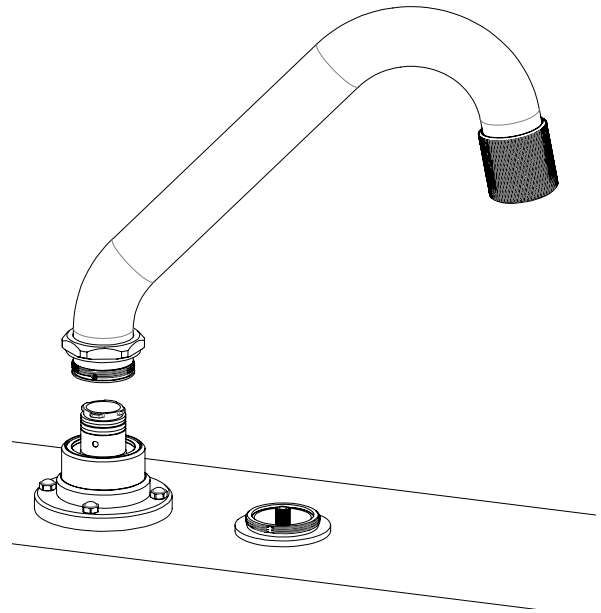


Using the 1/4 turn locking feature, place the spout on the rough in and turn clockwise.

3.

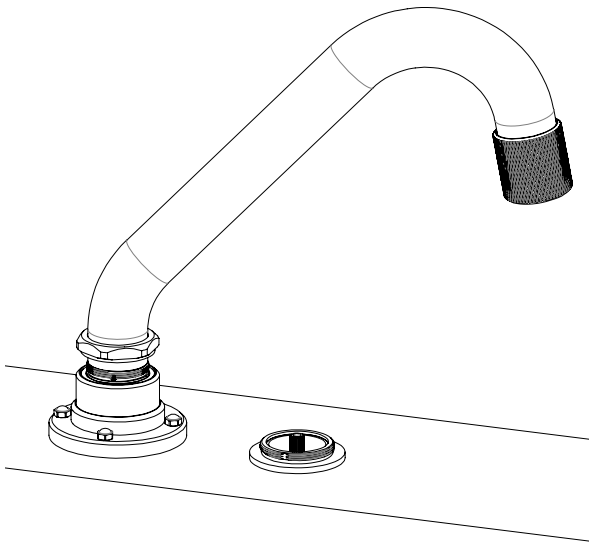


Rotate 1/4 turn.

4.

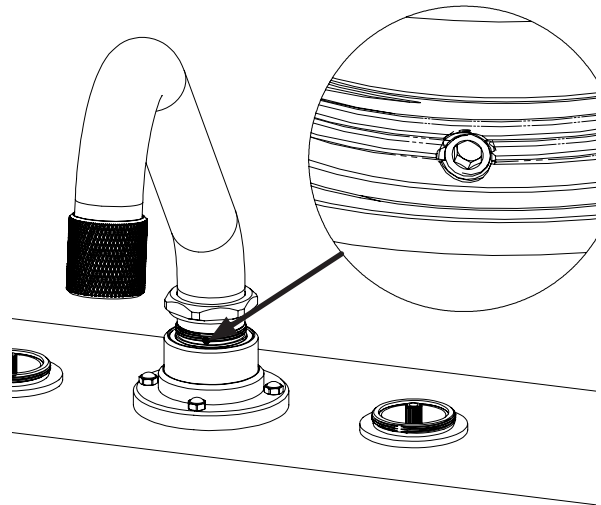


Fasten the set screws in order to secure the spout.

5.

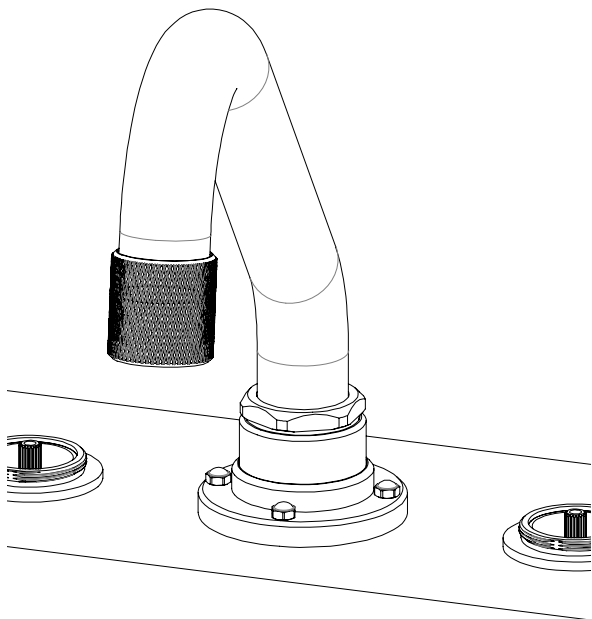


Thread the deco hex ring down to the spout trim.

6.

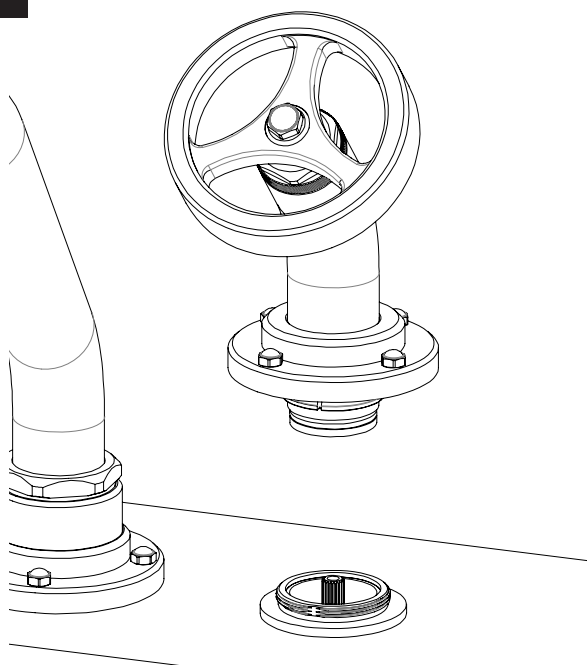


Place the handle trim down on the rough in ensuring that the broach aligns with the valve stem.

7.

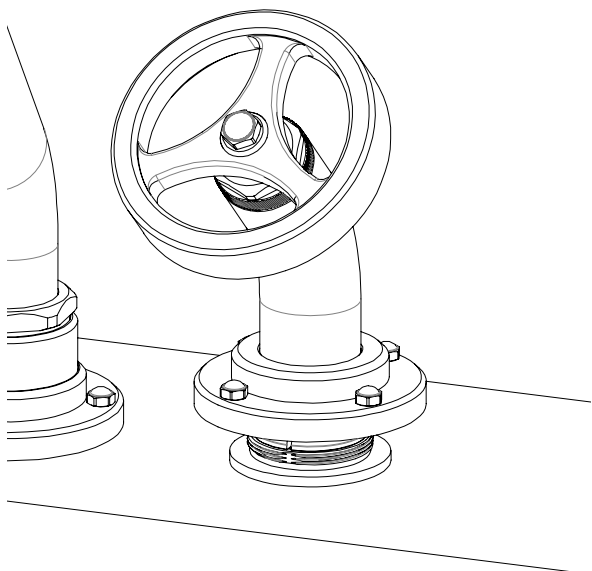


Thread the deco ring down to lock the escutcheon to the deck.

8.

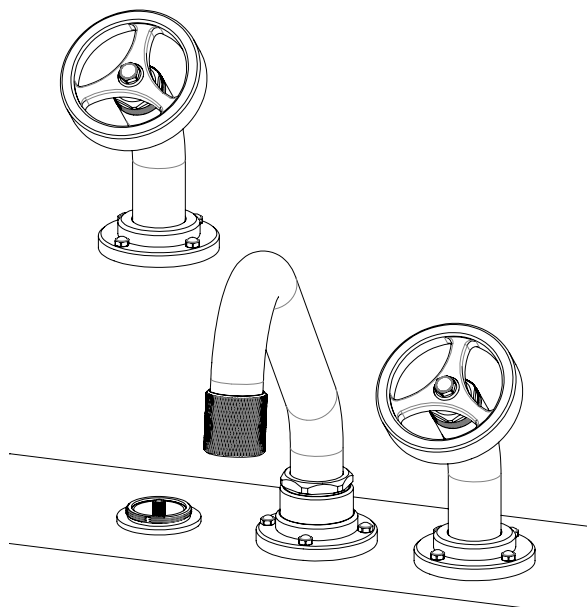

Repeat steps 6 & 7 for the second handle trim.

9.

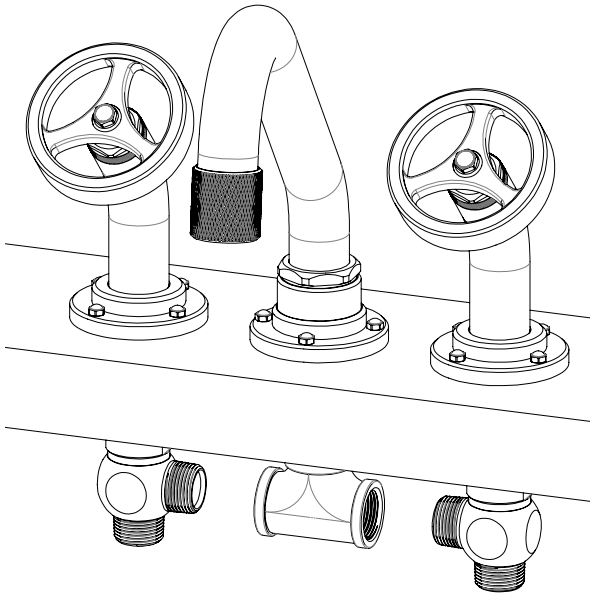

Check the functionality of both handles.